



# Fielders WaterGate<sup>®</sup>

Product and Installation Guide





Fielders WaterGate® products are made from ZINCALUME®, ensuring they will not crack or warp. Fielders WaterGate® is an easy 3-Step Installation Guide which saves you time and money as it simply locks in and hides away, keeping your gutters free from leaves and debris.

#### WaterGate® Gutter Leaf Guard

- The high-strength leaf guard for your gutters
- Easy to install, suits corrugated or tiled roofing
- Reduces fire risk, prevents clogged and overflowing gutters
- Fits standard 125mm wide guttering



#### Checklist before you buy WaterGate® Gutter Leaf Guard


- Your house has standard 125mm wide guttering
- Roof overhang is about 5cm into the gutter
- Pair of tin snips for trimming
- Thick gloves for protection

#### WaterGate® Gutter POP Leaf Guard


- Removable perforated grate that can be quickly installed and removed, preventing leaves, debris and other material such as tennis balls from blocking the entry to the downpipe
- Fits all downpipes up to 100mm wide




#### Installation - New Roof

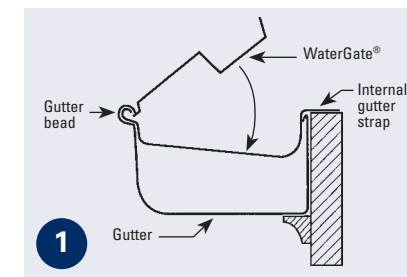

Insert the small 'v' shaped end of WaterGate® into the gutter's outer edge bead.

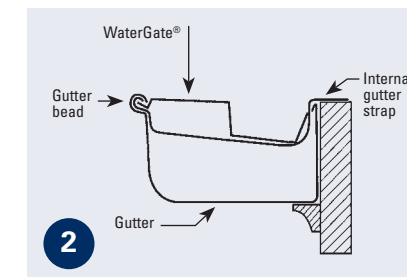


Lower WaterGate® until it sits on the internal gutter straps.

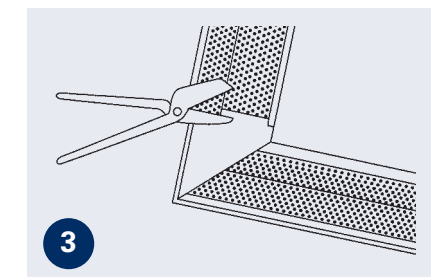


Insert further lengths, allowing a 25mm overlap. At corners, cut to 45° with tin snips and butt together.


#### Installation - Existing Steel Roof

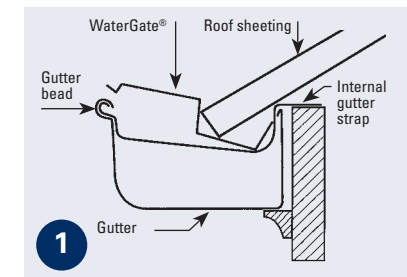

Position WaterGate® as shown so the flat edge slips up under the roof's edge and is supported beneath by the internal gutter straps.

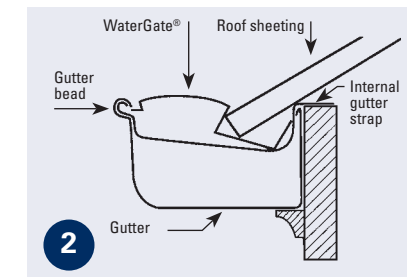

Wearing heavy gloves, compress the WaterGate® by hand, by pushing it against the back of the gutter.

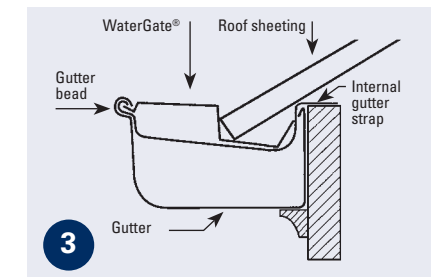


This will allow you to insert the outer 'v' shaped edge into the gutter's outer edge bead, clipping the WaterGate® securely in place.

#### Installation - Existing Tile Roof

For a tiled roof, simply slide back one row of tiles to expose the entire gutter and proceed as above for new roofing, sliding tiles back into place when finished.

#### Guttering with External Brackets

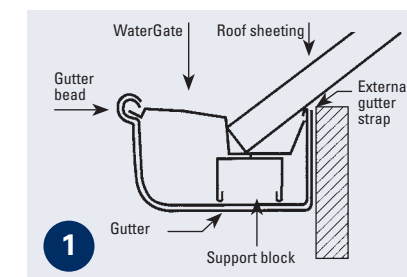

Support blocks are available from WaterGate® stockists. Position support blocks one metre apart install as shown above.

#### SAFETY ADVICE



Remember to wear thick gloves when installing WaterGate®.

