



Fielders WaterGate[®]

Product and Installation Guide



Fielders WaterGate® products are made from Zinc, ensuring they will not crack or warp. Fielders WaterGate® is an easy 3-step installation system which saves you time and money. WaterGate® simply locks in and hides away, to keep your gutters free from leaves and debris, reducing fire risk, and preventing clogged and overflowing gutters.

WaterGate® Gutter Leaf Guard

- The high-strength leaf guard for your gutters
- Easy to install, suits corrugated or tiled roofing
- Reduces fire risk, prevents clogged and overflowing gutters
- Fits standard 125mm wide guttering

Checklist before you buy WaterGate® Gutter Leaf Guard

- Your house has standard 125mm wide guttering
- Roof overhang is about 5cm into the gutter
- Pair of tin snips for trimming
- Thick gloves for protection



WaterGate® Gutter Leaf Guard

WaterGate® Gutter POP Leaf Guard


- Removable perforated grate that can be quickly installed and removed, preventing leaves, debris and other material such as tennis balls from blocking the entry to the downpipe
- Fits all downpipes up to 100mm wide




WaterGate® Gutter POP Leaf Guard




Installation - New Roof

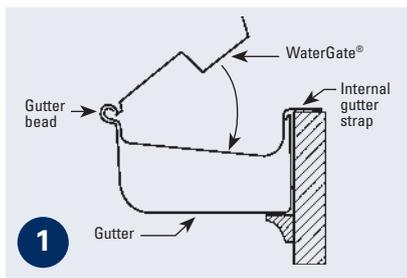

Insert the small 'v' shaped end of WaterGate® into the gutter's outer edge bead.

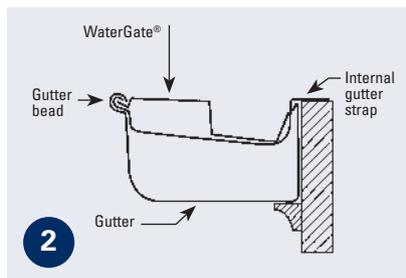


Lower WaterGate® until it sits on the internal gutter straps.

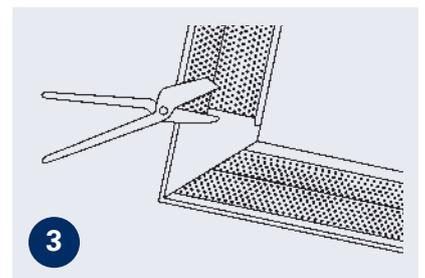


Insert further lengths, allowing a 25mm overlap. At corners, cut to 45° with tin snips and butt together.


Installation - Existing Steel Roof

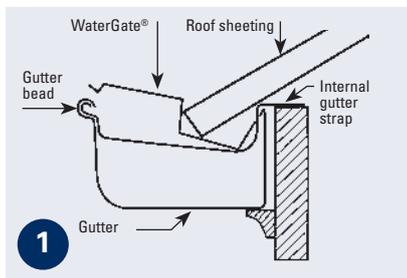

Position WaterGate® as shown so the flat edge slips up under the roof's edge and is supported beneath by the internal gutter straps.

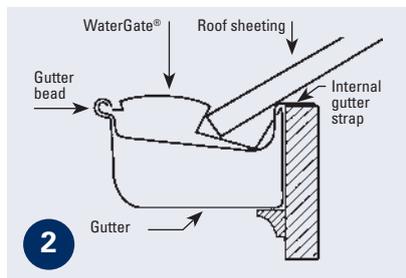

Wearing heavy gloves, compress the WaterGate® by hand, by pushing it against the back of the gutter.

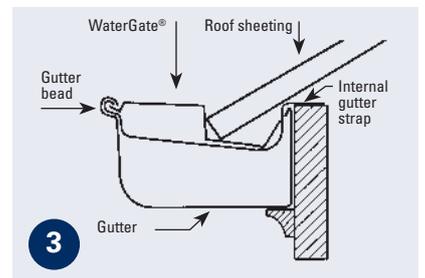


This will allow you to insert the outer 'v' shaped edge into the gutter's outer edge bead, clipping the WaterGate securely in place.

Installation - Existing Tile Roof

For a tiled roof, simply slide back one row of tiles to expose the entire gutter and proceed as above for new roofing, sliding tiles back into place when finished.

Guttering with External Brackets

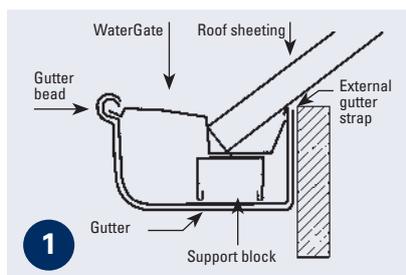

Support blocks are available from WaterGate® stockists. Position support blocks one metre apart install as shown above.

SAFETY ADVICE



Remember to wear thick gloves when installing WaterGate®.

